



HOLE LEGEND		
DRILLED OR PUNCHED HOLE	HOLE DIA	TOL
	0.135 to 0.125	±.003
	0.125 to 0.250	±.004
	0.251 to 0.500	±.005
	0.501 to 1.000	±.007
IDENT	DESCRIPTION	QTY
A		

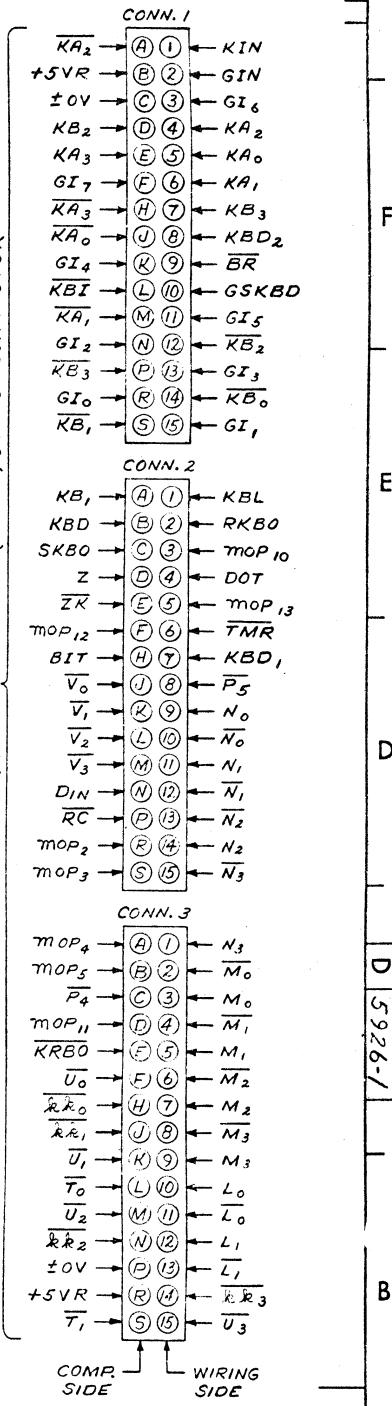

I.C. LOCATION	TYPE	W.L. NO.	TERM FOR VCC +5V	TERM FOR ±0V	QTY.
L17	F9930	376-0022	14	7	1
L25	F9935	376-0025	14	7	1
L6,16,23	F9936	376-0026	14	7	3
L1,2,3,4,6,7,9,12,13,14,15,24	F9946	376-0023	14	7	12
L10	F9943	376-0033	14	7	1
L18	SN7400N	376-0002	14	7	1
L5,20	SN7402N	376-0016	14	7	2
L19,26	SN7404N	376-0010	14	7	2
L21,22	SN7410N	376-0003	14	7	2
L21,22	SN7431N	376-0012	14	7	2
L27,28,29,30,31	SN7474N	376-0006	14	7	5

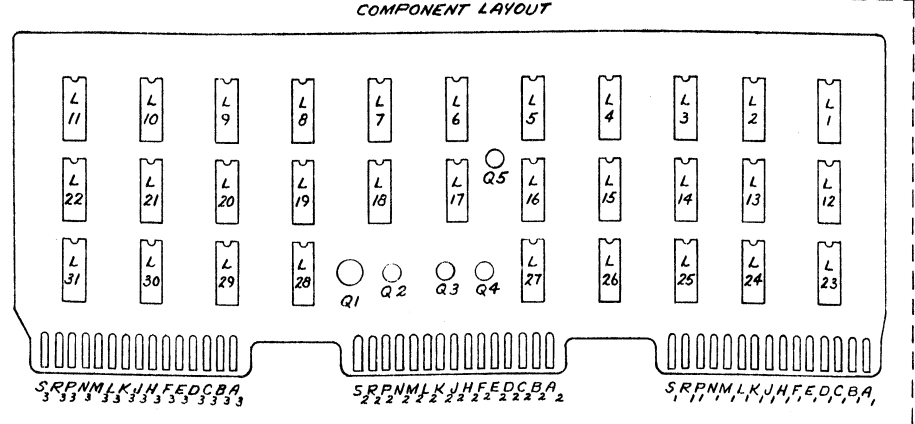

WANG PART NO.	ITEM	QTY.	NAME	MATERIAL	DESCRIPTION
	FIRST USED ON	ASSY USED ON			
WANG LABORATORIES, INC. TEWKSBURY, MASS. U.S.A.					
BY DWAN F.S.S.			DATE 11/25/61	APPROVED BY	DATE 1/10/62
CHK R.J.T.			DATE 5-15-62	M ENGR	
E. C. CONTROL				MFG ENGR	
TITLE SCHEMATIC LOGIBLOC #5926					
KBD, CORE ADDRESS, KEYBOARD REG.					
SEE ENGR SPECIFICATIONS					
TOL. EX. AS NOTED					
XX ± 0.10 FRAC ± 1/64					
XXX ± 0.05 ANG. ± 1°30' FINISH V					
SCALE	SHT	OF	WANG PART NUMBER	SIZE	DRAWING NUMBER
			D 5926-1		4

REVISION	REVISED PER	DATE	BY	APPROVED BY
1	REVISED PER E.C.			
2	REVISED PER E.C.			
3	REVISED PER E.C.			
4	REVISED PER E.C.			